




FLIR G343™

Industry-Leading Optical Gas Imaging (OGI)
Camera for Carbon Dioxide (CO₂)

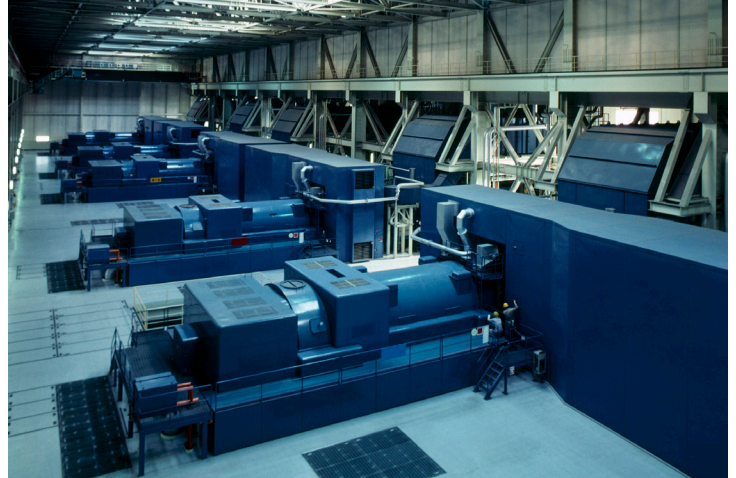

The FLIR G343 is an innovative Optical Gas Imaging (OGI) camera used to visualize possible carbon dioxide (CO₂) gas leaks. Whether or not CO₂ is a byproduct of a production process or used as a trace gas, the G343 is designed with your safety and efficiency in mind. This advanced cooled 320 × 240 (76,800 pixels) resolution camera can detect CO₂ leaks from a safe distance, reducing inspection time by scanning large areas without interfering or shutting down large-scale manufacturing operations. Featuring a rotating, color LCD touchscreen, the G343 is ideal for detecting CO₂ gas in complex systems including enhanced oil recovery, carbon capture systems, and hydrogen-cooled power generators. Combined with FLIR Ignite™ software, the FLIR G343 allows you to easily upload images and videos to the cloud where you can edit, organize, store, and share data.



www.flir.com/G343

SUPERIOR GAS VISUALIZATION

Detect gas leaks accurately in real-time

- Efficiently scan thousands of components with FLIR's patented High-Sensitivity Mode (HSM)
- Auto-adjust the level and span of your image with 1-Touch Level/Span
- Comfortably inspect facilities with superior ergonomics

IMPROVED SOFTWARE INTEGRATION

Record and report findings efficiently with the FLIR ecosystem

- Effortlessly edit and store images in the cloud, and wirelessly transfer files using the included FLIR Ignite cloud service
- Easily incorporate with third-party software solutions
- Built in Wi-Fi and Bluetooth® allow you to connect to smartphones or tablets
- Conveniently navigate large areas with FLIR Inspection Route and GPS log on board

BETTER ERGONOMICS FOR OPERATION

Comfortably interact with the camera

- Expand inspection capabilities with quick and easy exchangeable lens options
- View targets from any direction with rotating 10.16 cm (4 in) LCD touchscreen
- Efficiently operate with improved touchscreen Graphical User Interface (GUI)
- Advanced features to streamline the inspection process, including Multi-REC (recording mode)

For more information contact: Sales@TeledyneFLIR.com
or to find your local support number, visit: flir.com/contactsupport

www.teledyneflir.com

SPECIFICATIONS

Detector and Optics Data		FLIR G343	
IR Resolution	320 × 240 pixels		
Thermal Sensitivity/NETD	15 mK at 30°C (86°F)		
Detector Type	Focal plane array (FPA), cooled InSb		
Spectral Range	4.2 μm to 4.4 μm		
Detector Pitch	30 μm		
Sensor Cooling	Stirling Microcooler (FLIR MC-3)		
Gas Sensitivity	CO ₂ : <1.1 ppm x m (ΔT = 10°C, Distance = 1 m)		
Digital Image Enhancement	High sensitivity mode (HSM), noise reduction filter		
Available Lenses	24° × 18° (23 mm); 14.5° × 10.8° (38 mm)		
F-Number	1.59		
Focus	Autofocus, Manual focus		
Image Presentation		Video Recording and Streaming	
Display	4", 640 × 480 pixel rotatable, touchscreen LCD	Radiometric IR Video Recording	RTRR (.csq)
Viewfinder	Built-in, tiltable OLED, 800 × 480 pixels	Non-Radiometric IR or Visual Video	H.264 to memory card
Image Presentation Modes	IR image, visual image, high sensitivity mode (HSM)	Radiometric IR Video Streaming	Over UVC
Color Palettes	Arctic, White hot, Black hot, Iron, Lava, Rainbow, Rainbow HC	Non-Radiometric IR Video Streaming	H.264 (AVC) or MPEG4 over RTSP (Wi-Fi); MJPEG over UVC and RTSP (Wi-Fi)
Zoom	1–8× continuous, digital zoom	Visual Recording	H.264 to memory card
Laser Pointer	Class 2	Environmental & Certifications	
Annotations		Operating Temperature Range	-20°C to 50°C (-4°F to 122°F)
Voice	60 seconds with Bluetooth on still images and video	Storage Temperature Range	-30°C to 60°C (-22°F to 140°F)
Text	Text from predefined list or soft keyboard on touchscreen	Encapsulation	IP54 (IEC 60529)
Image Sketch	Yes: on infrared only	Shock	25 g (IEC 60068-2-27)
Communication & Data Storage		Vibration	2 g (IEC 60068-2-6)
FLIR Inspection Route	Enabled in the camera	Additional Information	
MultiREC Recording	Record multiple files automatically in customizable order	Battery Type	Rechargeable Li-ion battery; 7.4 V, charged in camera or separate 2-bay charger
GPS	Location data automatically added to every still image; first frame in video from built-in GPS; data logging feature	Battery Operating Time	>2.5 hours at 25°C (68°F) and typical use
Compass	Yes	Battery Charging Time	2.5 hours to 95% capacity, charging status indicated by LEDs
Cloud Services (via Wi-fi)	FLIR Ignite for direct, secure image uploading, organizing, storage, and sharing (required firmware available)	Camera Size	251.6 mm × 164.5 mm × 170.9 mm (9.9 in × 6.48 in × 6.73 in)
Storage Media	Removable SD card	Camera Weight	3 kg (6.18 lb)
Image File Formats	Standard JPEG, measurement data included. Infrared-only mode.	Mounting Interfaces	UNC ¼"-20
Communication Interfaces	USB 2.0, Bluetooth via headset, Wi-Fi, HDMI	Box Contents	
Video Out	HDMI; DVI	Packaging	Infrared camera with lens, battery: 2 pcs., battery charger, power supply including multi-plugs, hand strap, neck strap, lens cap, lens cap strap, memory card, HDMI-HDMI cable, USB cable, screwdriver TX20, printed documentation, and hard transport case

Specifications are subject to change without notice.
For the most up-to-date specs, go to www.teledyneflir.com

For more information contact: Sales@TeledyneFLIR.com
or to find your local support number, visit: flir.com/contactsupport



emitec
industrial

Emitec Messtechnik AG
Birkenstrasse 47
6343 Rotkreuz

+41 41 748 60 10
info@emitec.ch
www.emitec-industrial.ch



Emitec Group ■ ■ ■
#1 in Test & Measurement, worldwide.

This product is subject to United States export regulations and may require US authorization prior to export, reexport, or transfer to non-US persons or parties. Diversion contrary to US law is prohibited.

For assistance with confirming the Jurisdiction & Classification of Teledyne FLIR, LLC products, please contact exportquestions@flir.com.

©2022 Teledyne FLIR, LLC. All rights reserved.

Revised 03/01/23
G343_Datasheet-LTR 21-0000