

# AS-04

Antenna Set 30 MHz to 6 GHz



## Main Features

- 30 MHz to 6 GHz frequency range
- Excellent antenna factor
- Tripod adapter for easy vertical-horizontal polarization change
- Individual calibration
- Robust, rustproof aluminium construction
- Lightweight

AS-04 is a compact broadband antenna set composed of a BC-01 Biconical Dipole and LP-04 Log Periodic Dipole Array designed for radiated emissions and immunity testing that can be used in conjunction with any receiver or spectrum analyzer.

Its ideal companion is the EMI Receiver Unit 9060, which can be easily mounted on the antenna mast.\*

\*The direct connection between antenna and PMM receiver eliminates additional sources of uncertainties due to coaxial cable attenuation and scattering. For further information please consult our brochure "Fully CISPR-Compliant Digital EMC/EMI receivers 10 Hz to 18 GHz".


# AS-04

## Antenna set 30 MHz to 6 GHz

SPECIFICATIONS	BC-01	LP-04
Frequency range	30 to 200 MHz	200 MHz to 6 GHz
Gain	-15 +2 dBi typical	6 dBi typical
Antenna factor	8 to 14 dB/m typical	12 to 40 dB/m typical
Max input power	100 W	100 W
Connector	N female	N female
Dimensions (L x H x W)	65 x 65 x 137 cm	78 x 10 x 75 cm
Weight	1,8 kg	1,1 kg
Colour	RAL 7035	
Impedance	50 Ω nominal	
Construction	Aluminium	



LP-04 and tripod

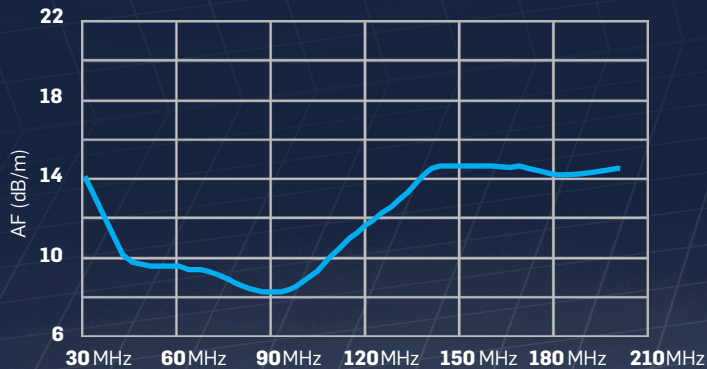

BC-01 - Antenna Factor @ 10m



LP-04 - Antenna Factor

### Ordering information:

**AS-04 antenna set** 30 MHz to 6 GHz with individual calibration reports.  
**AS-04/TC antenna set** 30 MHz to 6 GHz with typical calibration reports.  
 Includes: BC-01 biconical antenna, LP-04 log-periodic antenna, TR01 wooden column tripod, antenna mounting adapter to change polarization, 5 meter/6 GHz/N(m)-N(m) RF cable, soft carrying case, user's manual, calibration reports\*

\*Individual calibration reports are provided with AS-04  
 AS-04/TC does not include individual calibration but typical antenna factor reports

### Optional accessories:

**Additional TR-01 set**  
 Includes: TR01 60-180 cm wooden column extendable tripod, antenna mounting adapter to change polarization, soft carrying case  
**Additional 5 meter/6 GHz/N(m)-N(m) RF cable**  
 Antenna Mounting kit **AMK-01**

## Related products and services

### Receivers

- 7010/01: EMI Receiver 9 kHz to 1 GHz
- 7010/03: EMI Receiver 9 kHz to 3 GHz
- ER8000/00 EMI Receiver 9 kHz to 30 MHz
- ER8000/01 EMI Receiver 9 kHz to 3 GHz
- ER9000/00 EMI Receiver 10 Hz to 30 MHz
- ER9000/01 EMI Receiver 10 Hz to 3 GHz
- 9010F: EMI Receiver 10 Hz to 30 MHz
- 9010/03P: EMI Receiver 10 Hz to 300 MHz
- 9010/30P: EMI Receiver 10 Hz to 3 GHz
- 9010/60P: EMI Receiver 10 Hz to 6 GHz
- 9030: EMI Receiver 30 MHz to 3 GHz
- 9060: EMI Receiver 30 MHz to 6 GHz
- FR-4003: Field Receiver 9 kHz to 30 MHz

### Antennas

- BL-01: Biconical Log Periodic Antenna 30 MHz to 6 GHz
- DR-01: Double-ridged Horn Antenna 6 to 18 GHz
- LP-02: Log Periodic Antenna 200 MHz to 3 GHz
- LP-03: Log Periodic Antenna 800 MHz to 6 GHz
- TR-01: Antenna Tripod
- VDH-01: Van der Hoofden Test Head 20 kHz to 10 MHz
- Antenna Set AS-02 (BC01+LP02+TR01)
- Antenna Set AS-03 (BC01+LP02+LP03+TR01)
- Antenna Set AS-05 (BC01+LP04+DR01+TR01)
- Antenna Set AS-06 (BC01+LP-02+LP03+DR01+TR01)
- Antenna Set AS-07 (BL01+TR01)
- Antenna Set AS-08 (BL01+DR01+TR01)
- RA-01: Rod Antenna 9 kHz to 30 MHz
- RA-01-HV: Rod Antenna 150 kHz to 30 MHz
- RA-01-MIL: Rod Antenna 9 kHz to 30 MHz

### Calibration services

- Ansi 63.5 Antenna Factor
- SAE ARP 958-D
- Free-Space Antenna Factor

Sales:  
 Via Rimini, 22  
 20142 Milano - ITALY  
 Phone: +39 02 581881  
 Fax: +39 02 58188273



E-Mail: [nardait.support@narda-sts.it](mailto:nardait.support@narda-sts.it)  
 Internet: [www.narda-sts.it](http://www.narda-sts.it)



**emitec**  
industrial

Emitec Messtechnik AG  
 Birkenstrasse 47  
 6343 Rotkreuz

+41 41 748 60 10  
[info@emitec.ch](mailto:info@emitec.ch)  
[www.emitec-industrial.ch](http://www.emitec-industrial.ch)

Emitec Group ■ ■ ■  
 #1 In Test & Measurement, worldwide.

