



## MAIN FEATURES

- Emissions and immunity testing in a single, shielded environment
- Meets basic standard: IEC/EN 61000-4-20
- Meets standards for emissions testing: CISPR 14-1, IEC 61000-6-3 and IEC 61000-6-4 for EUTs without connected cables
- Ideal for design qualification and pre-certification

## GTEM 2000

### GTEM cell for emissions and immunity testing

A GTEM (Gigahertz Transverse Electro Magnetic) cell is a test site for efficiently performing both radiated immunity and emissions testing in a single, controllable and shielded environment. Compared to other test sites, GTEM testing is faster with high accuracy and excellent reproducibility.

In principle, the GTEM cell is a coaxial line expanding pyramidally and having an impedance of  $50 \Omega$ . At its end, the line is terminated by a combination of termination resistors and RF absorbers designed and constructed to match the above mentioned impedance.

The GTEM 2000 has a maximum septum height of 2000 mm and is suitable for emissions and immunity testing.

#### Standard configuration


- Under-carriage with locking casters and additional supports
- Door, left or right side, clear opening of 103 cm x 154 cm
- Shielded window 30 cm x 10 cm
- Door contact for free application
- EUT Box-1 with 2x 16 A filter, 1 socket inside, line safety switch, earth leakage circuit breaker, switchable illumination
- Media interface (Media S) for 3x N-type connectors and optical feed through
- Measurement report for TDR, return loss and input power requirements for 10 V/m (30 - 3000 MHz)
- Shipped disassembled, required Teseq supervisor, option ASS 2000

#### Options

- Special filter solutions
- Additional door
- SAE opening, clear opening of 93.4 mm x 93.4 mm
- Test house software


**Specifications**

	GTEM 2000
Max. septum height	2000 mm
Septum height at marker position	1732 mm
EUT size (max. dimension, LxWxH in m)	1.50 x 1.50 x 1.32
EUT dimension for uniform-area 0 to 6 dB (LxWxH) in m	0.666 x 0.666 x 0.666
RF input connector	N-type
Nominal impedance	50 Ohm
Frequency range	DC up to 20 GHz
Frequency range according IEC/EN 61000-4-20	30 to 3000 MHz
Return loss / VSWR (DC to 18 GHz)	>11 dB (typ. >15 dB) / <1.8:1 (typ. <1.45:1)
Shielding effectiveness (30 MHz to 3 GHz)	>60 dB (typ. >80 dB)
Max input power	1000 W
Required input power for 10 V/m (isotropic, 5 points, 30 to 3000 MHz)	39 W (12 W CW)
Field deviation (isotropic, 9 points, 30 to 3000 MHz)	<6 dB

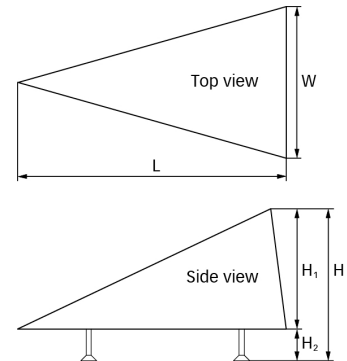


**General Specifications**

	GTEM 2000
Dimension (LxWxH in m)	8.95 x 4.62 x 3.24
Weight	approx. 2500 kg
Height H1 of cell corpus	3.05 m
Height H2 of supports	0.19 m
Door (LxH in m)	1.03 x 1.54

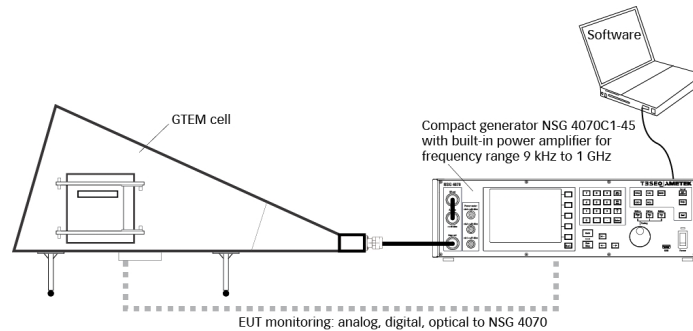

**Example of immunity test setup 9 kHz to 1 GHz with one power amplifier**

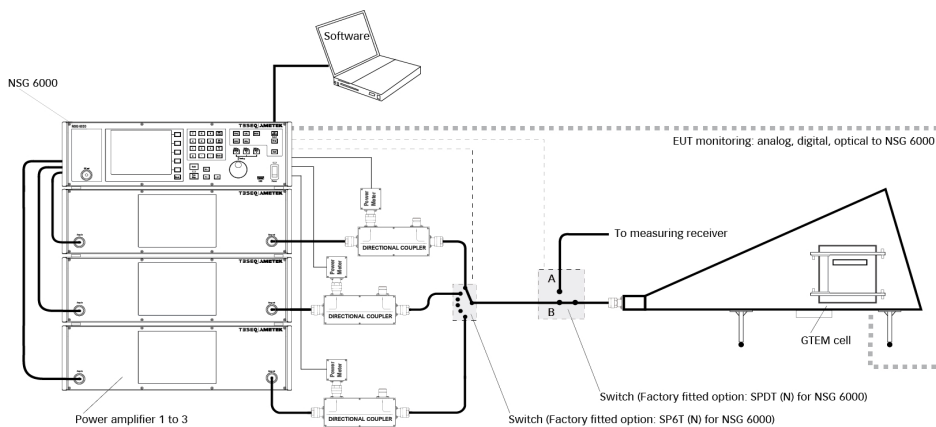

**Example of test setup 9 kHz to 6 GHz with three power amplifiers and measuring receiver**

**Ordering information**

The door side and the country version of the single phase AC socket needs to be selected.



**Model No. and options (selection shown for EU only)**

Description	Item No	Text
GTEM 2000	250700	GTEM with septum height 2000 mm, door with clear opening of 103 cm x 154 cm, shielded window of 30 cm x 10 cm, door contact for free application, EUT Box-1 with 2x 16 A filter, 1 Schuko-socket inside, line safety switch, RCD, switchable illumination, media interface (Media S) for 3x N-type connectors and optical feed through, max. 1000 W RF input power, switchable fans, shipped disassembled, required Teseq supervisor option ASS 2000

**emitec**  
industrial

Emitec Messtechnik AG  
Birkenstrasse 47  
6343 Rotkreuz

+41 41 748 60 10  
info@emitec.ch  
www.emitec-industrial.ch

Emitec Group #1 in Test & Measurement, worldwide.